

Antra-I_Glastuer_1-fluegelig Antra-I_glass-door_single-door

Europe

Art.-nr. / part no. // Länge / length mm:

USO46-1800DB // 1800

USO46-2100DB // 2100

USO46-2300DB // 2300

USO46-2540DB // 2540

USA


part no. // length [inch]:

USU46.1-1800DB // [70 7/8"]

USU46.1-2100DB // [82 11/16"]

USU46.1-2300DB // [90 9/16"]

USU46.1-2540DB // [100"]


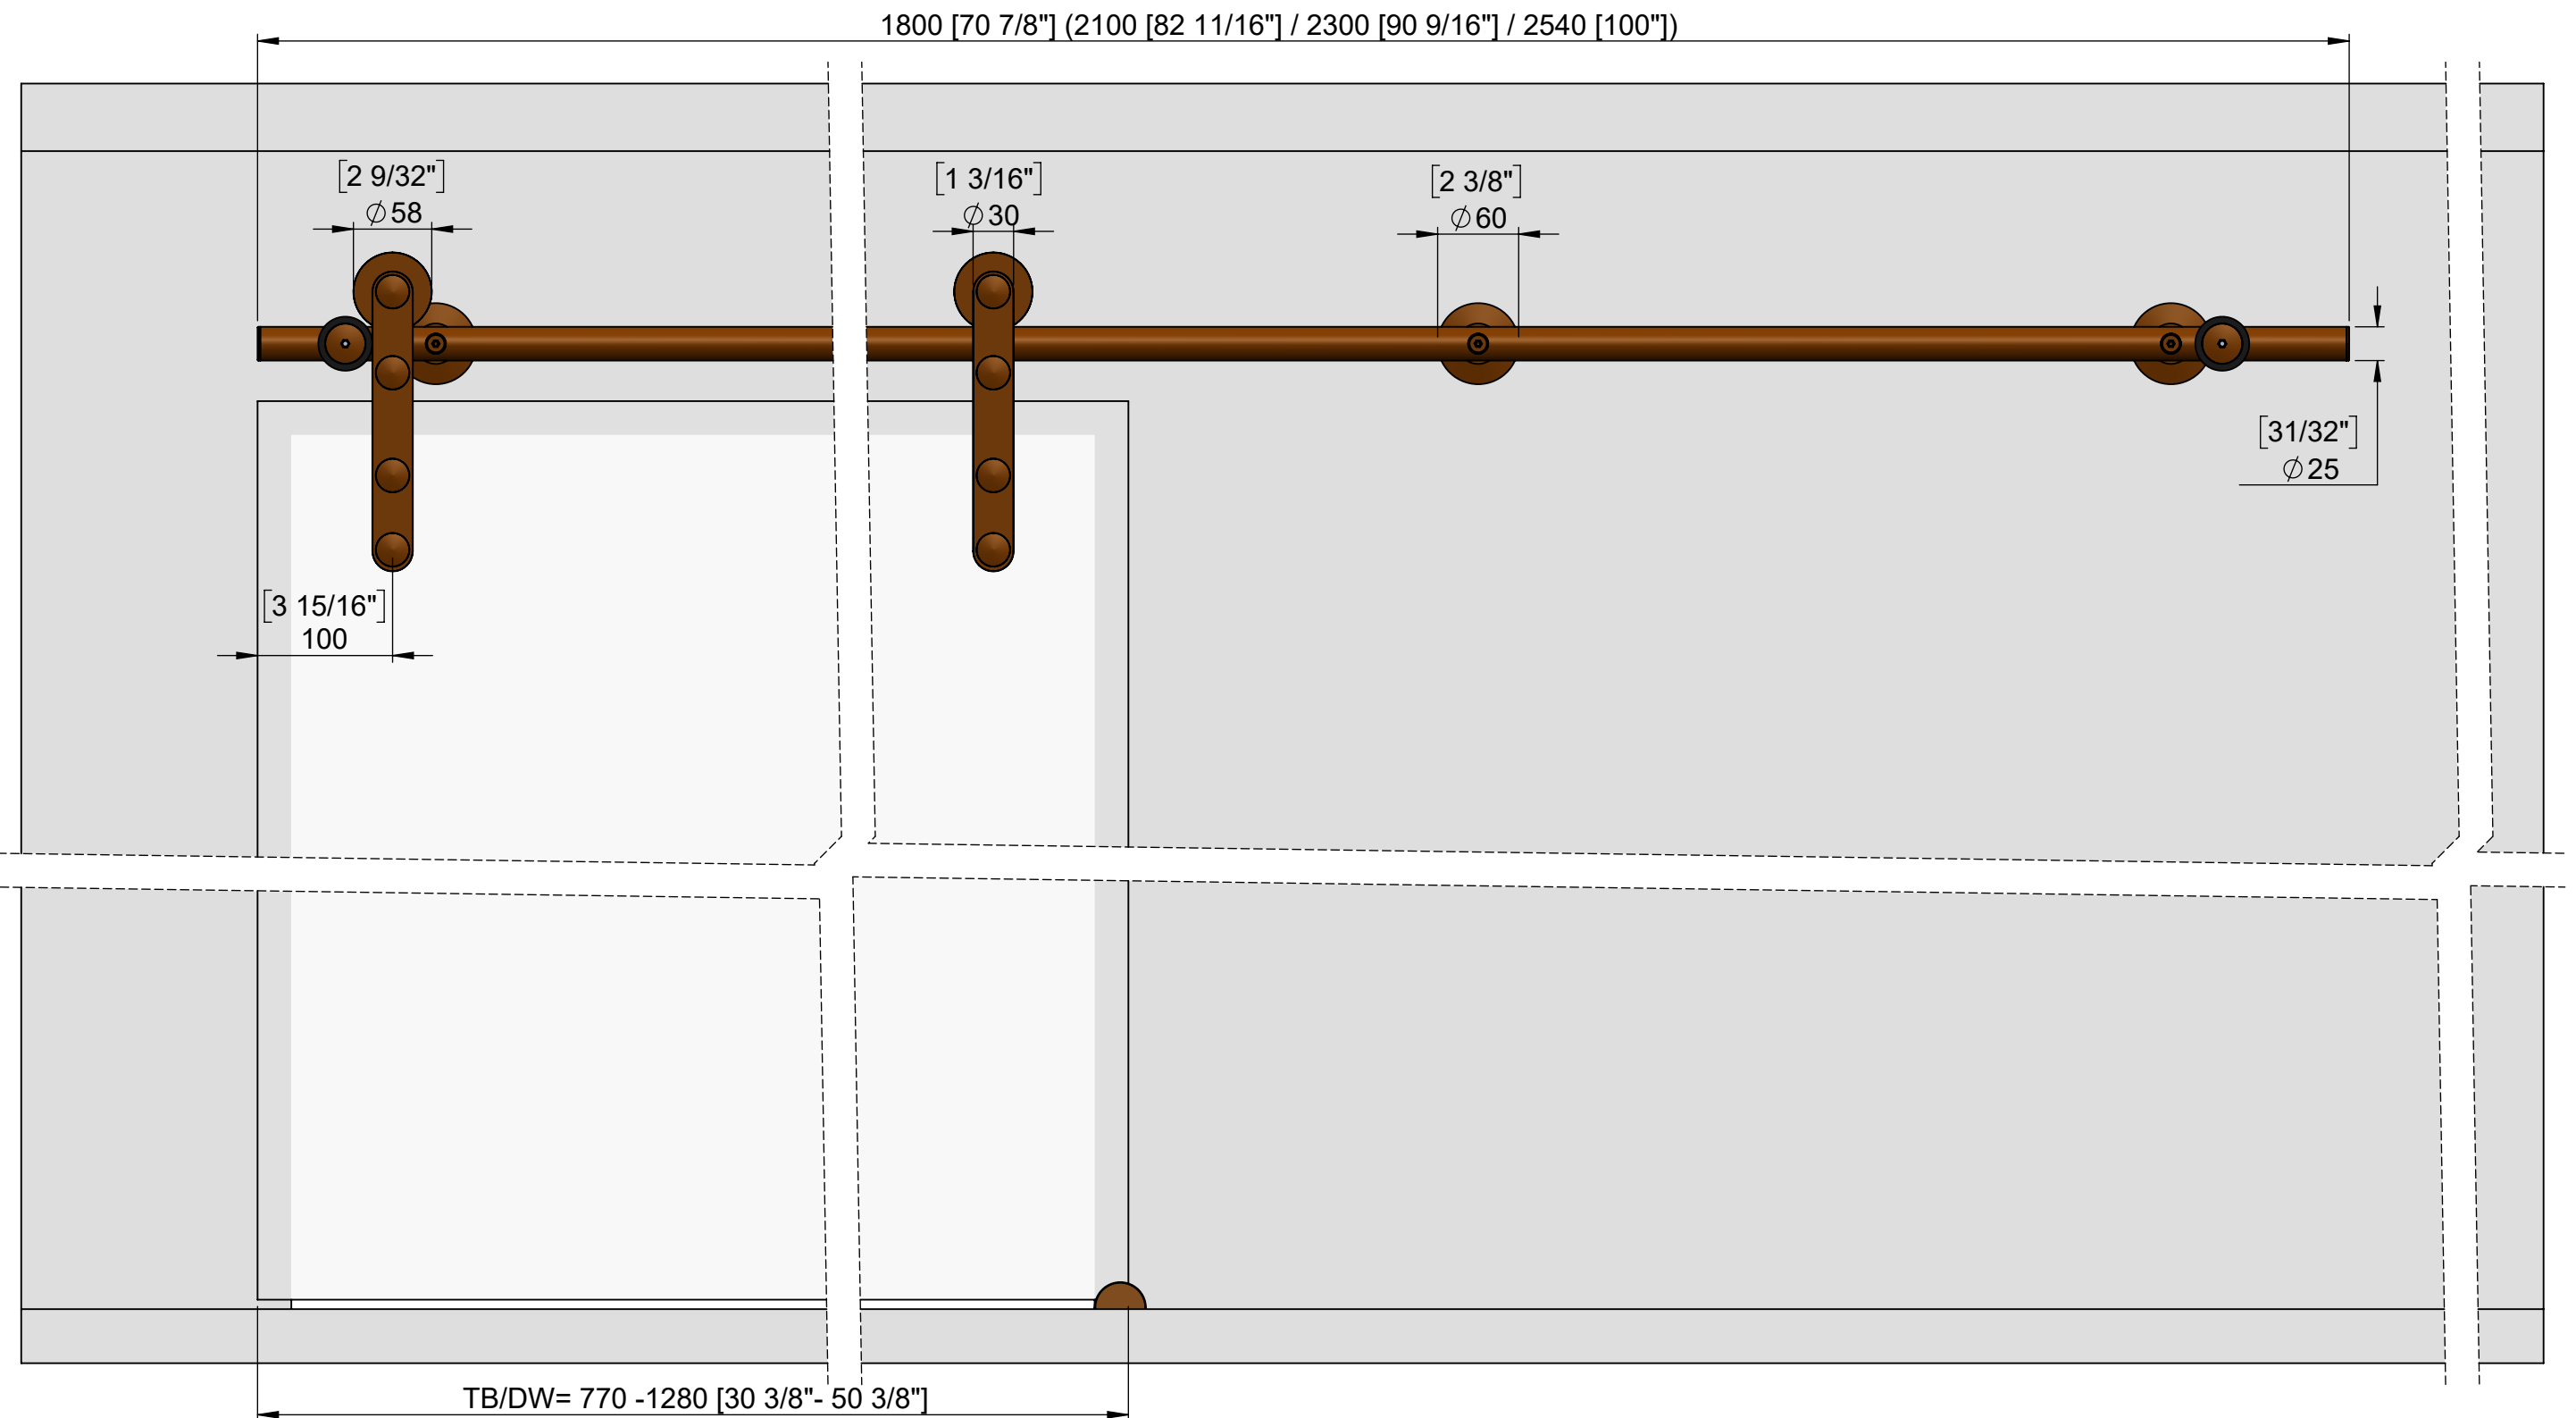


TB=Türbreite / DW = door width

Maßstab / scale 1:5

measure
[inch]
mm

Antra-I_Glastuer_1-fluegelig
Antra-I_glass-door_single-door

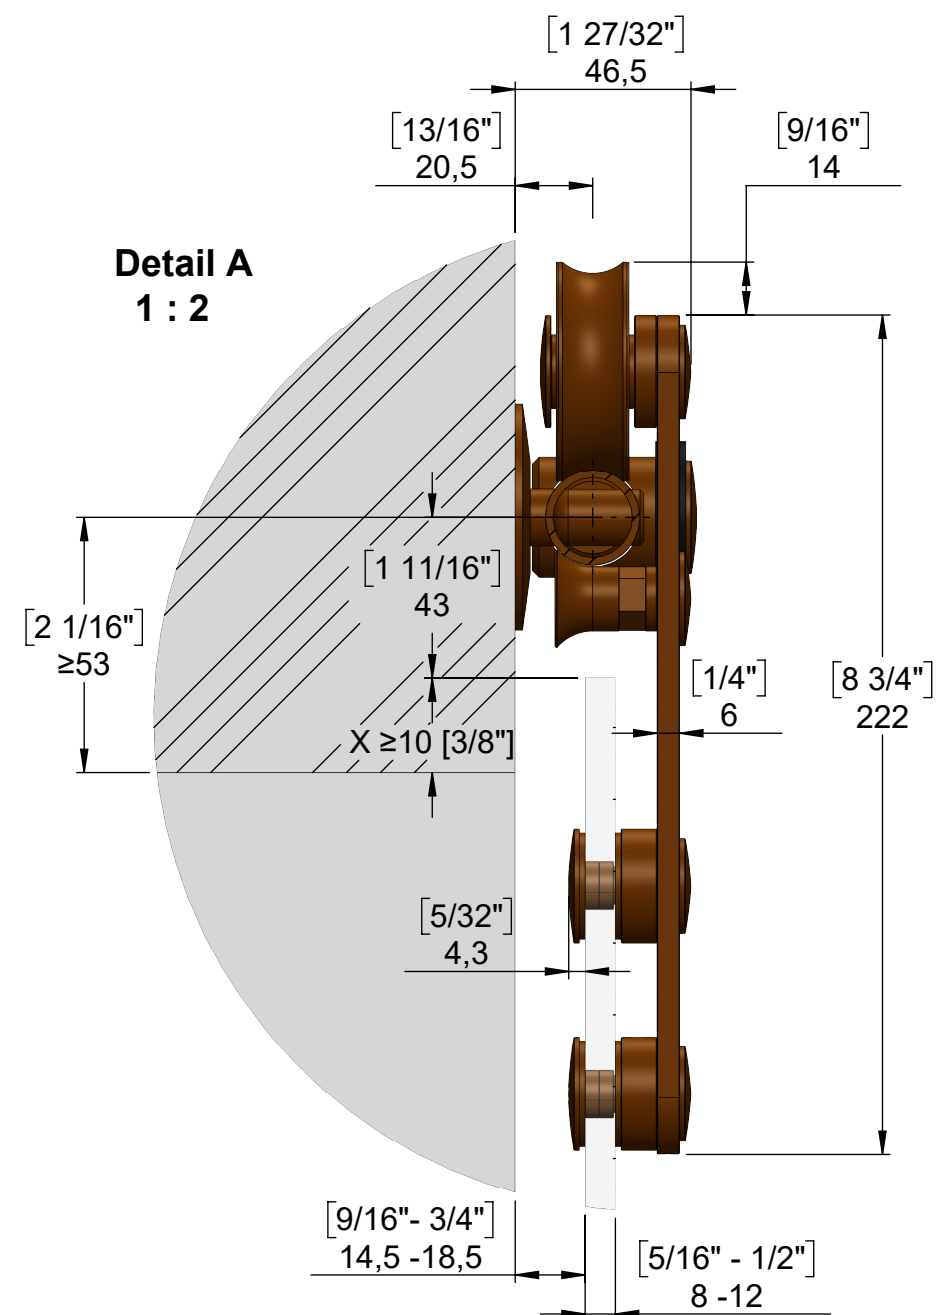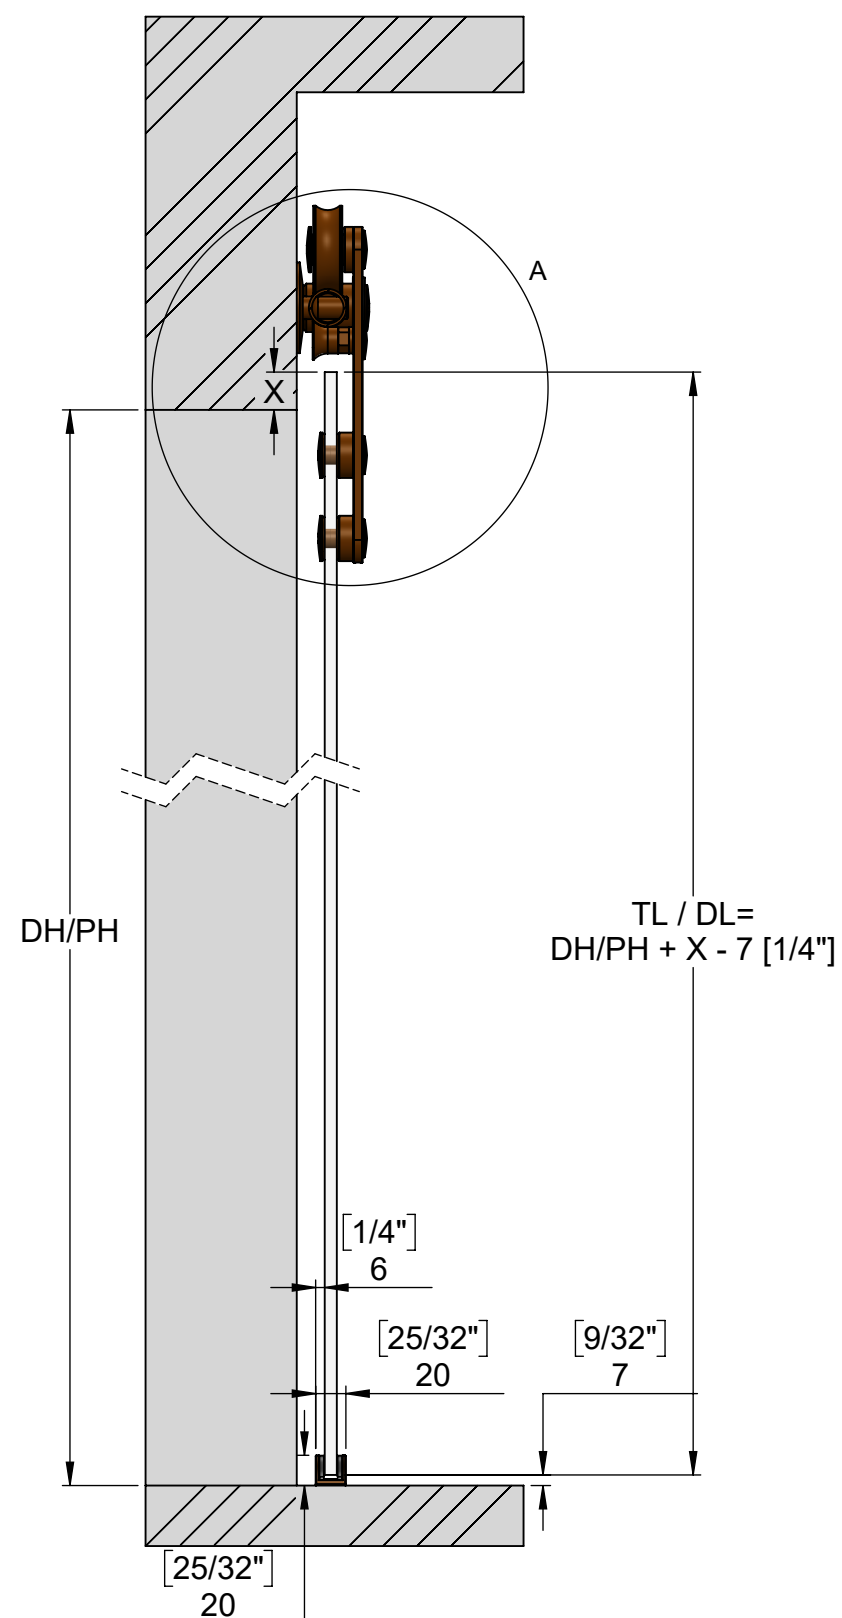


X = Abstand Tür - Durchgang / distance door - passage
DH = Durchgangshöhe / PH = passage height
TL = Türlänge / DL = door length


Maßstab / scale 1:5

measure
[inch]
mm

Antra-I_Glastuer_1-fluegelig
Antra-I_glass-door_single-door

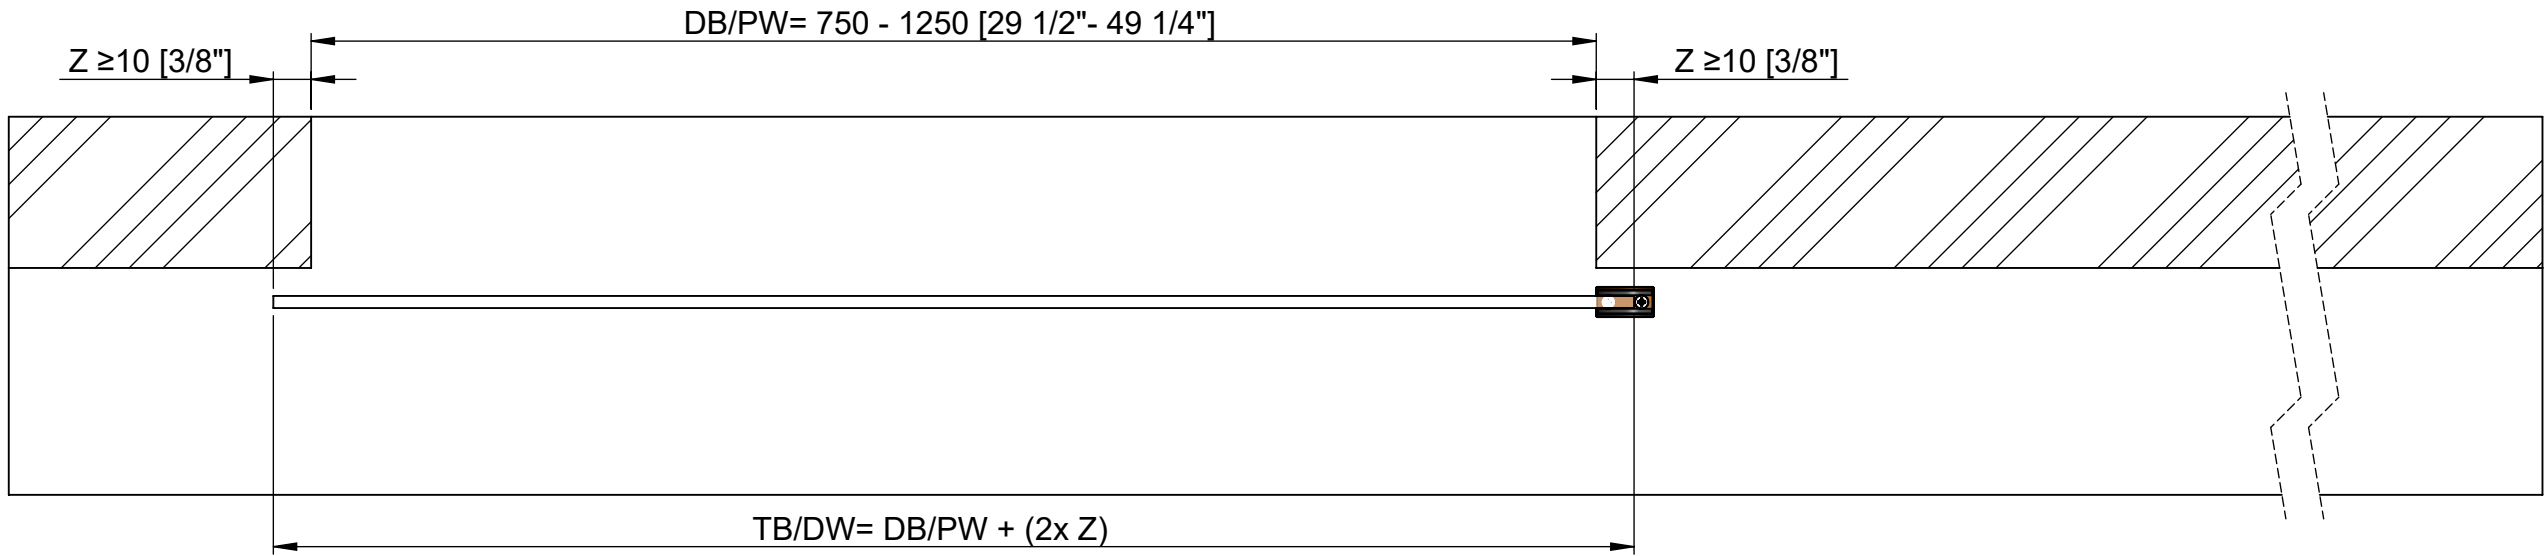

Erforderliche Bohrungen am Türblatt zur Befestigung der Laufwagen
Drill holes required on the door leaf for fixing the trolleys

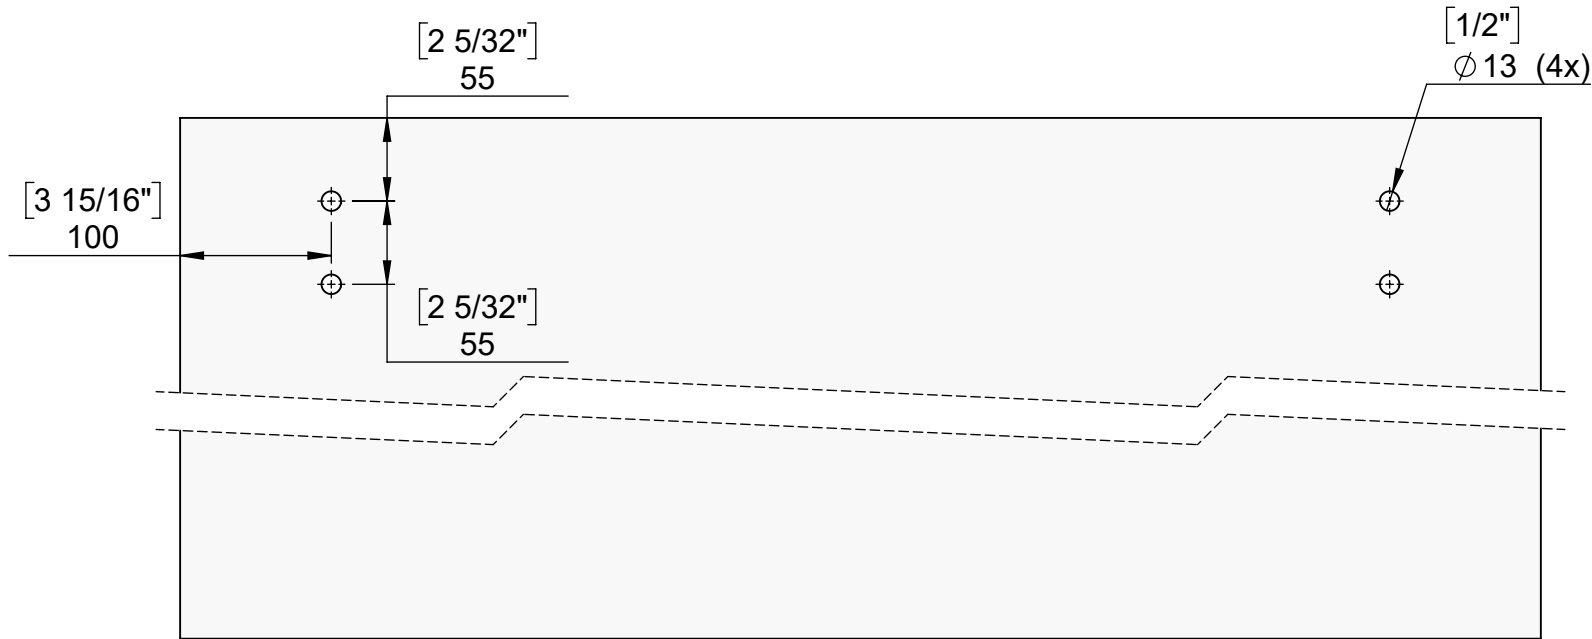

Z = Türüberstand / door overlap
DB = Durchgangsbreite / PW = passage width
TB = Türbreite / DW = door width

Maßstab / scale 1:5

measure
[inch]
mm