




1 Set sliding door fittings Runway




2 Guide rail with cap

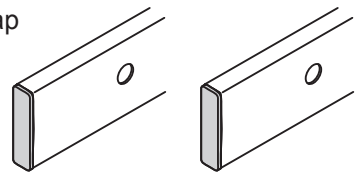


3 Wall fixtures

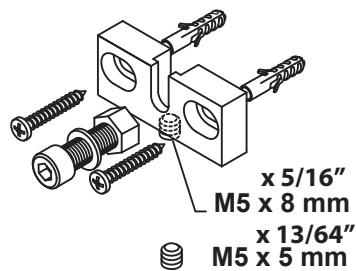


5 Door stopper- set right and left




6 Bottom guide (without screws and dowels)



4 Trolley complete

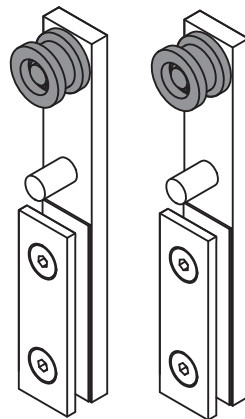

8 Rail connector



7 Tools



Comply with all general safety regulations when installing the sliding door fittings!

Installation to be completed by qualified licensed contractor.

Be sure to tighten all screw connections one week after starting to use the sliding door fittings!


Never use scouring agents to clean the sliding door fittings; rather use commercially available stainless-steel cleaners!

- Attention
- Screw on
- Screw on
- Drill
- Dowels
- Level
- Perpendicular
- Measure Mark
- Visual inspection
- Tool
- Measure
- Clarify questions
- At right angle
- 2 people required

Installation instructions

Sliding door fittings Runway

for 2 leaf glass doors (5/16" - 1/2")

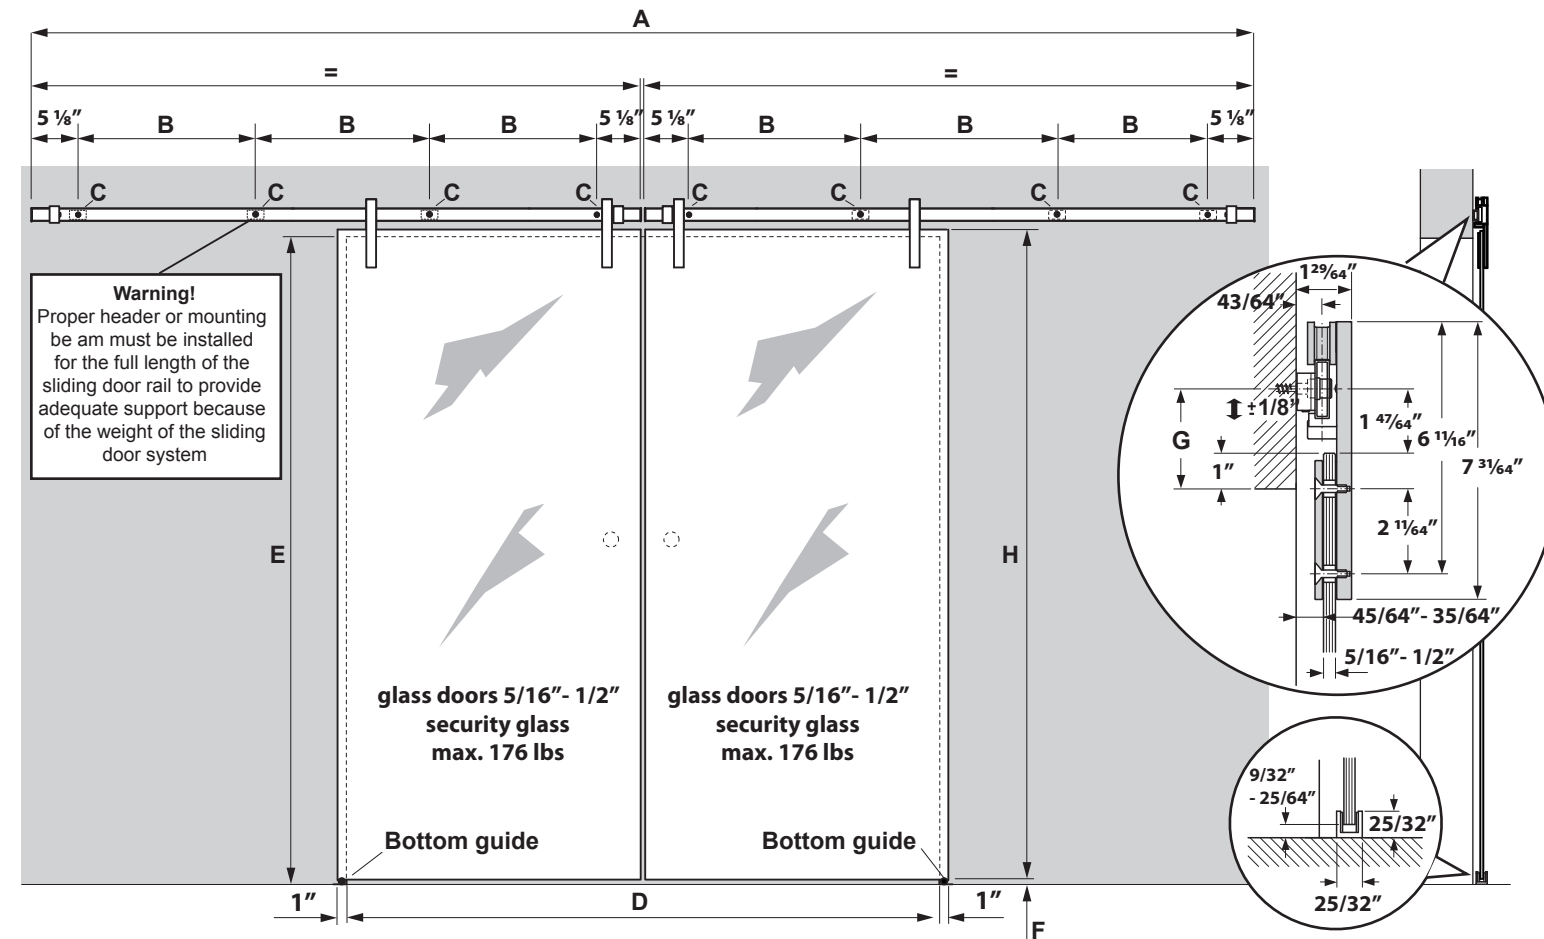

Complete-sets

A inch	B inch	C piece	D inch	E max. inch	F inch	G inch	H max. inch (H = E - F + 1")
144"	20 5/8"	8	59" - 70 7/8"	98 27/64"	9/32" - 25/64"	2 23/32"	99 9/64"
192"	21 7/16"	10	78 3/4" - 94 1/2"	98 27/64"	9/32" - 25/64"	2 23/32"	99 9/64"

ABP beyerle

Beyerle US L.L.C.

5126 S Royal Atlanta Drive, Tucker, GA 30084

Phone (770) 349 - 6324, Fax (770) 934 - 3384, mail: info@beyerle-us.com, www.beyerle-us.com

65_30_00.0229_Runway_Glas_US

Right to make technical changes reserved - Dimensions in (mm) or (inch) - Version 09.2018
© by ABP-Beyerle GmbH

ABP beyerle

